


Pos	Function
1	P Rod-Full bore Tank
0	Rod closed- Full bore partially open to Tank
2	P Full bore-Rod Tank
3	P Rod and Full bore

Available too with Inlet right . Put DX after complet code  
 All ports are 1/2 BSP  
 Surface treatment : white zinc plated (std)  
 Standard setting of relief valve : 175 bar  
 Code of this valve is : MB/31-R2V-PC-YP-42-T175-(DX)  
 Complet with handle and knob M40 x 190-  
 Other lenght (140-220-260) on request  
 On request relief valve is available too with plumbed

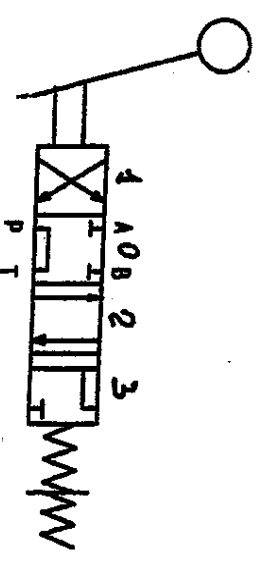

ORTA srl Brescia ( Italy )      Data 8/04/06      Dimensioni

Denominazione Lay out of bog splitter valve

Disegno      Peso Kg.      Trattam. White Zinc Plated

Materiale      Disegnato da Antonio Tegghiani

Modello MB-R2V-PC      Controllato da

**OHNEBERG hydraulik4u**  
 Inh. Stefan Ohneberg  
 Lafatscherjochstraße 7a  
 81825 München